







LAT-CON®

Produktübersicht / Product Overview

Product Type		Raster / Pitch .100" (2,54mm) Pancon P/N	Raster / Pitch .0787" (2,00mm) Pancon P/N	Raster / Pitch .050" (1,27mm) Pancon P/N
	Federleisten / IDC- Socket	050-0xx-435A	040-0xx-435A	030-0xx-435A
	Stiftleisten / Latch- Header	050-0xx-xxxx	040-0xx-xxxx	030-0xx-xxxx
	Stiftleisten / Box- Header	057-0xx-xxx	047-0xx-xxx	037-0xx-xxx
	IDC Stiftleisten / IDC- Header	057-0xx-1x5xx		

Produktschlüssel LAT-CON Raster 2,54mm (.100")
Product Key LAT-CON Pitch 2,54mm (.100")

Ordering Information Connector

number of contacts: 6,10,14,16, 20,26,30,34,40,50,60,64

A: short lever / B: long lever / E: Extended / S: Ear / Packing see note below

0 5 7 **B** 0 4 0 - 1 3 5 **S A / E**

Pin Length:
1: 13mm / 2: 4,5mm / 3: 2,9mm / 5: IDC / 6: 3,3mm / 7: SMT / 9: 17mm

3: 30µ" (0,76 µm) / 4: Flash Gold / 5: 15µ" (0,38 µm)

0: Angled / 1: Straight / 3: Press-In

B: Black color / G: Grey color / T: Hightemp Material



Box Header & IDC-Header

Ordering Information Strain Relief

number of contacts: 6,10,14,16, 20,26,30,34,40,50,60,64

0 5 7 - 0 0 0 - 0 **X X / E**



Ordering Information

number of contacts: 6,10,14,16, 20,26,30,34,40,50,60,64

A: polarization or short lever / B: long lever / E: Extended / Packing see note below


0 5 0 **B** 0 4 0 - 0 5 3 **A / E**

Pin Length:
1: 13mm / 2: 4,5mm / 3: 2,9mm / 5: IDC / 6: 3,3mm / 7: SMT / 9: 17mm

3: 30µ" (0,76 µm) / 4: Flash Gold / 5: 15µ" (0,38 µm)

0: Angled / 1: Straight / 3: Press-In / 4: Socket

B: Black color / G: Grey color / T: Hightemp Material

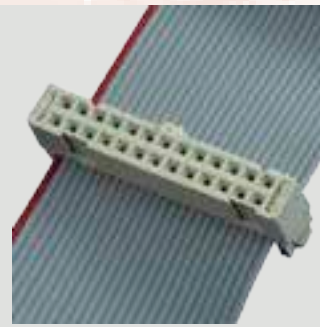


Latch Header & IDC-Socket

Ordering Information Strain Relief

number of contacts: 6,10,14,16, 20,26,30,34,40,50,60,64

0 5 0 - 0 0 0 - 0 **X X / E**

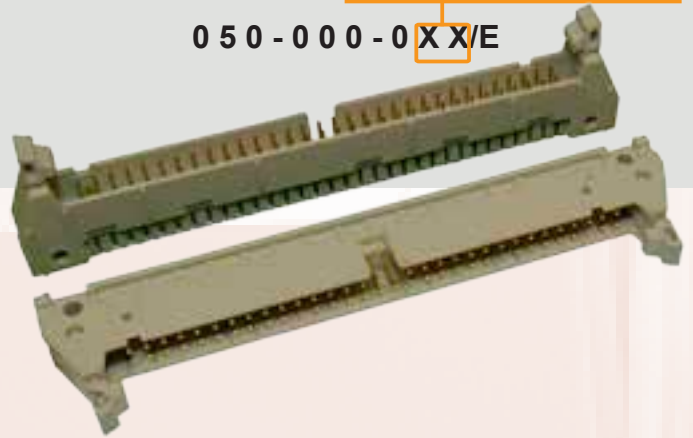

Packing:
Standard[no designation]= Tray or cardboard
J=Tray with Cap
R=Reel
T=Tube
U=Reel with Cap

Produktschlüssel LAT-CON Raster 2,00mm (.79")
Product Key LAT-CON Pitch 2,00mm (.079")

Ordering Information Connector

0 4 7 B 0 4 0 - 1 4 7 R

number of contacts: 6 to 64

Packing see note below

Pin Length:
3: 2,8mm / 7: SMT

3: 30µ" (0,76 µm) / 4: Flash Gold
/ 5: 15µ" (0,38 µm)

0: Angled / 1: Straight / 3:
Press-In

B: Black color / T: Hightemp
Material



Box Header



Ordering Information Connector

0 4 0 B 0 4 0 - 0 5 3 A

number of contacts: 6 to 64

A: polarization or short lever / B:
long lever / Packing see note below

Pin Length:
3: 3.0mm / 5: IDC / 7: SMT

3: 30µ" (0,76 µm) / 4: Flash Gold
/ 5: 15µ" (0,38 µm)

0: Angled; 1: Straight

B: Black color / T: Hightemp
Material



**Latch Header
&
IDC-Socket**



**Ordering Information
Strain Relief**

number of contacts: 6 to 64

0 4 0 - 0 0 0 - 0 **XX**

Packing:

Standard[no designation]= Tray or cardboard
J=Tray with Cap
R=Reel
T=Tube
U=Reel with Cap

Produktschlüssel LAT-CON Raster 1,27mm (.050“)
Product Key LAT-CON Pitch 1,27mm (.050“)

Ordering Information

0 3 7 B 0 3 0 - 1 4 7 R

number of contacts: 10 to 100


Packing see note below

Pin Length:
3: 2,4mm / 7: SMT


3: 30µ" (0,76 µm) / 4: Flash Gold
/ 5: 15µ" (0,38 µm)

0: Angled / 1: Straight


B: Black color / T: Hightemp
Material

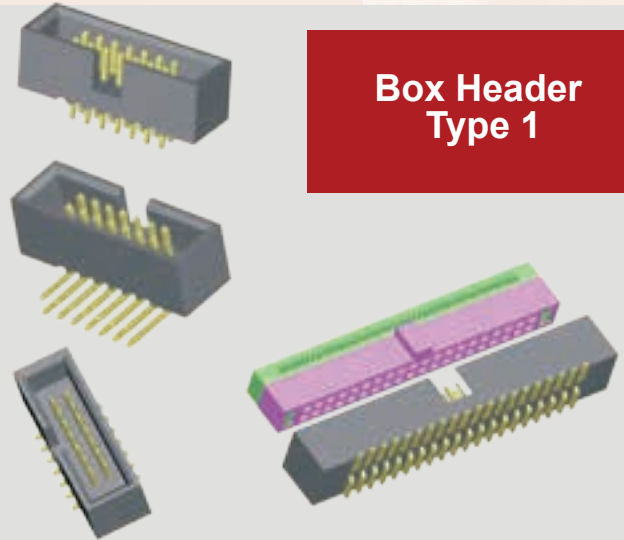

**Box Header
Type 1**

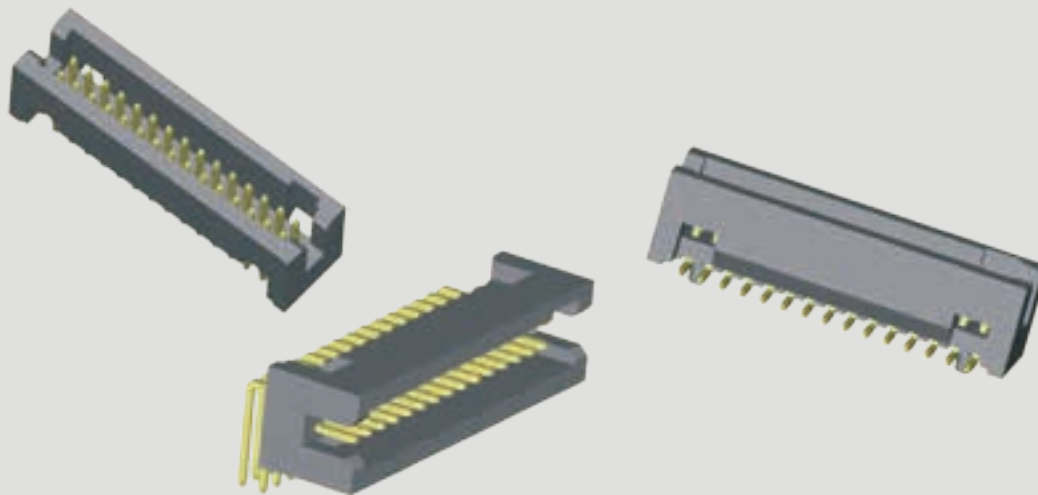

**Box Header
Type 2**

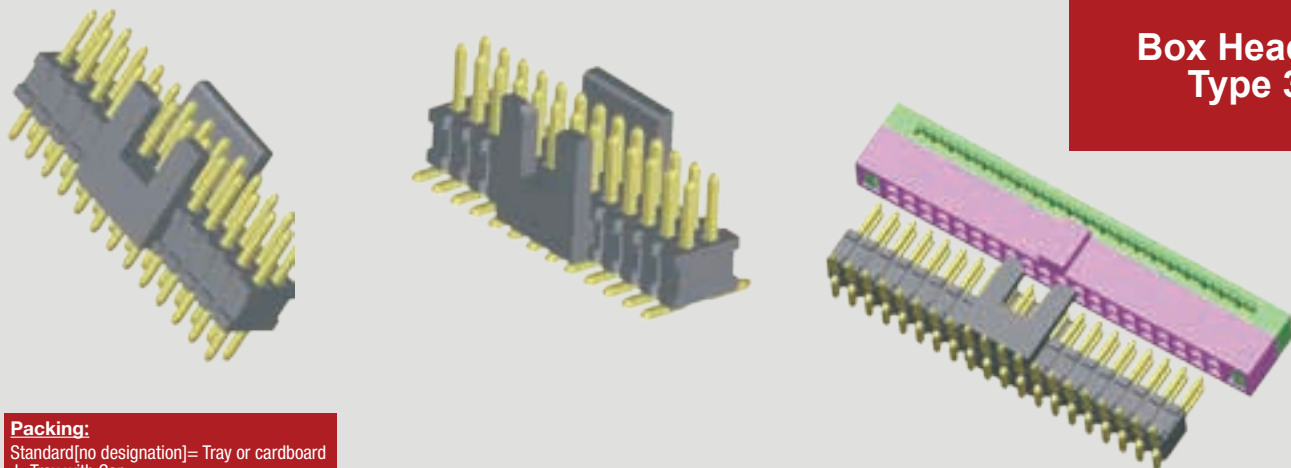



**Box Header
Type 3**

Packing:

Standard[no designation]= Tray or cardboard
J=Tray with Cap
R=Reel
T=Tube
U=Reel with Cap

Produktschlüssel LAT-CON Raster 1,27mm (.050")
Product Key LAT-CON Pitch 1,27mm (.050")

Ordering Information



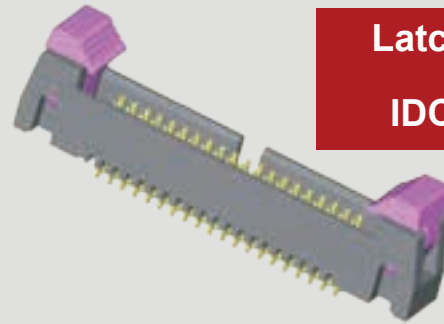
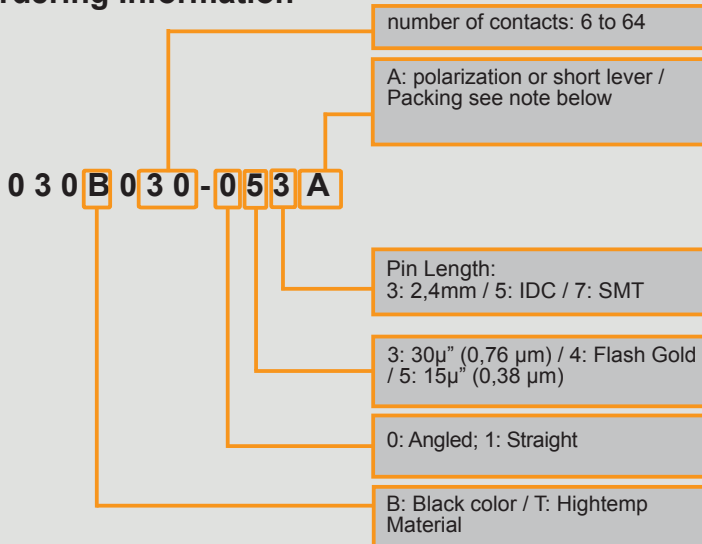


Latch Header & IDC-Socket

Ordering Information Strain Relief

number of contacts: 6 to 64

030-000-0XX

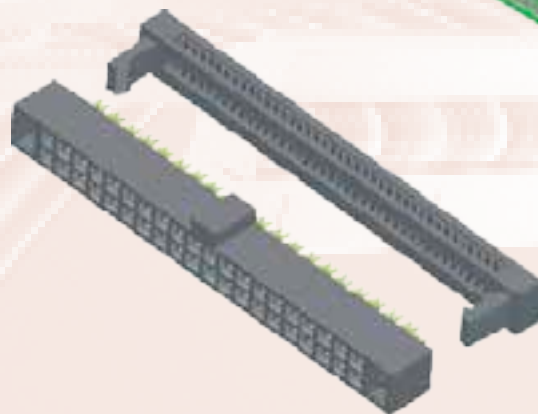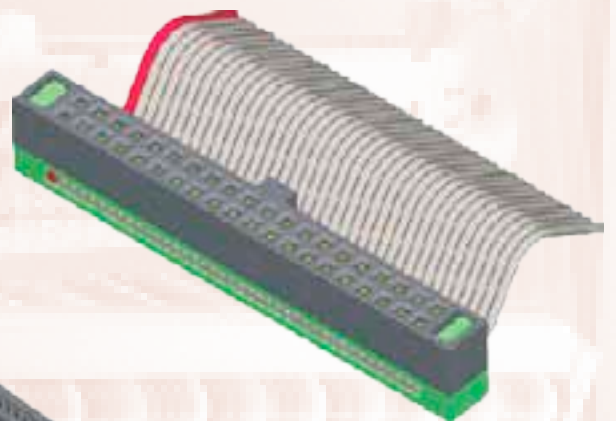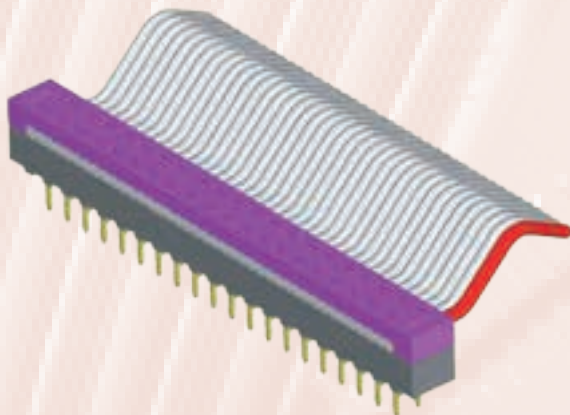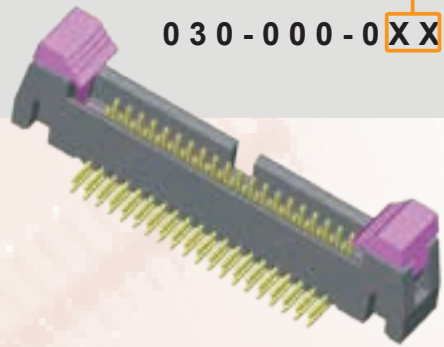

Packing:
Standard[no designation]= Tray or cardboard
J=Tray with Cap
R=Reel
T=Tube
U=Reel with Cap